
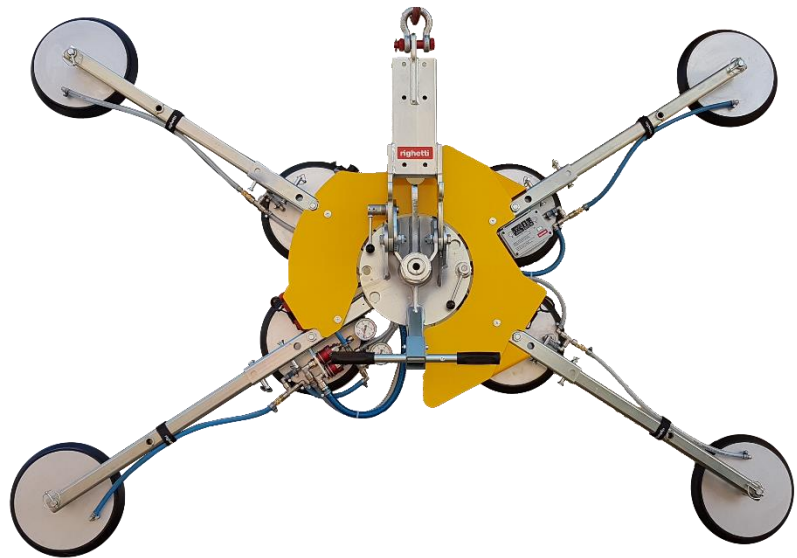


Model

VB4+4 RCMBM

Nosnost max.
800 kg

Bateriový
pohon

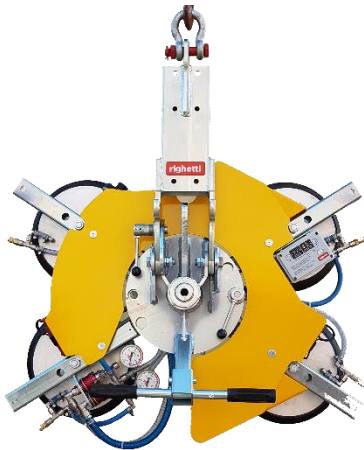

U **VB4+4 RCMBM** je možné odmontovat krycí štít, který umožňuje přístup k pěti vakuovému zvedacího zařízení. R můžete snadno a rychle odejmout.

† řisavnými talíři P s

@ ‡ u

† †" k#U "U u †" k#U "U

@ scaffoldings. VB4+4 is specific vacuum glass lifter for construction site use with **dual vacuum circuit** behind according to EN13155.

The same model is available with vacuum pads d. 390 mm and 600/1200 kg capacity (mod. VB4+4 RCMBM d4) and also with powered tilt and rotation (mod. VB4+4 RCEBE). Max capacity 800kg



Manual tilt 0-90°



4+4 vacuum pads d.310 mm



Safety devices




Modular frame



Vacuum glass lifter

Technical drawing

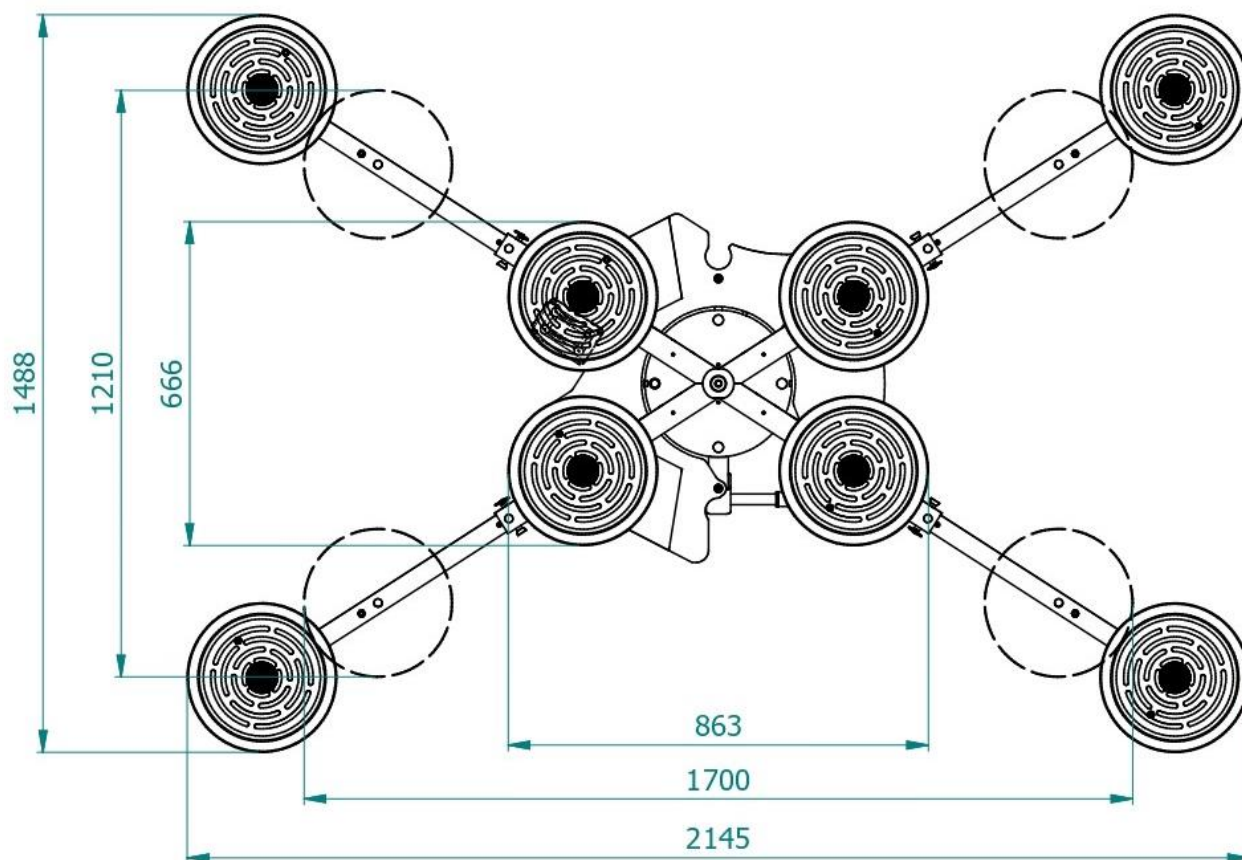

Technical specification

Application	Glass panels
Lifting capacity	Max 800 kg
Suction pads	No. 4 + 4 round suction pads diameter 310 mm Lipped pads with safety ring
Pad spread	Pads are movable in different configurations 4 pads mm 863 x 666 8pads mm 2145 x 1488
Load movement	Continuous 360 degree rotation, with possibility of automatic locking at each 90° 90 degree tilt, with possibility of automatic locking in upright and flat position
Operating system	DC vacuum pump powered from on-board batteries High capacity re-chargeable batteries Battery status indicator Economizer for reduction of the energy consumption
Vacuum system	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
Weight of lifter	100 kg
Structural depth	mm 250
Control	Manual on off valve on the lifter's frame Release of the load by dual action security command Remote control as optional
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit; Vacuum filter Battery charger 240 Volt Multi position hook connection Lowered suspension for installing of transom window